

CIRCULAR


Ceildoor Products Ltd Planetary House Planetary Road Willenhall Wolverhampton WV13 3SW

Description

A metal faced access hatch for use within MF and timber joist ceilings. Supplied either with a bead frame surround for tape and jointing/skim coat or plastering or a picture frame version to be fitted into a finished ceiling.

Protection against Moisture

Ceildoor metal access hatches are powder-coated white RAL 9010 full polyester paint. Even though the majority of access hatches are used internally, we use full polyester powder coating which is recommended for general exterior situations, where good weathering resistance is required against high levels of atmospheric moisture or in particularly aggressive atmospheres.

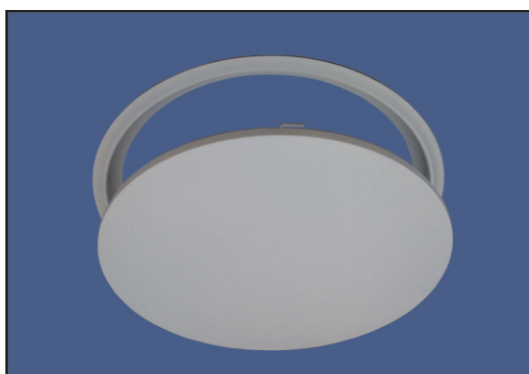

Composition of Hatches

1.2mm Zinc plated mild steel

Finish

Powder coated white RAL 9010 brush primed to all surfaces. (other colours available to special order).

Safety


It is extremely important that immediately after use of the access hatch that you close and lock it. Failure to do so will effect and impair the performance of the environment where it has been installed in the event of fire.

Shape & Size.


Listed below are the sizes available for the circular range.

Hatch dia. (mm)	Door Type	Structural opening	Clear Hatch opening
300	Single	307	270
450	Single	457	420
600	Single	607	570


Picture Frame in single layer Joist plasterboard application

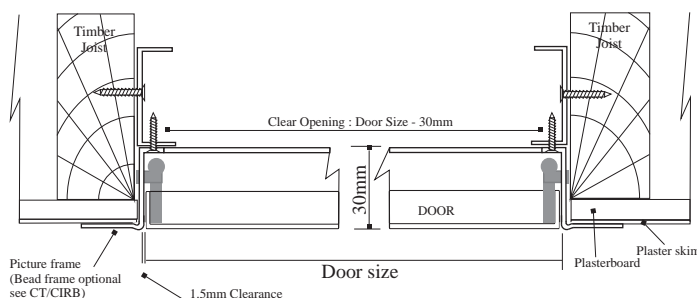

Picture Frame in single layer MF plasterboard application

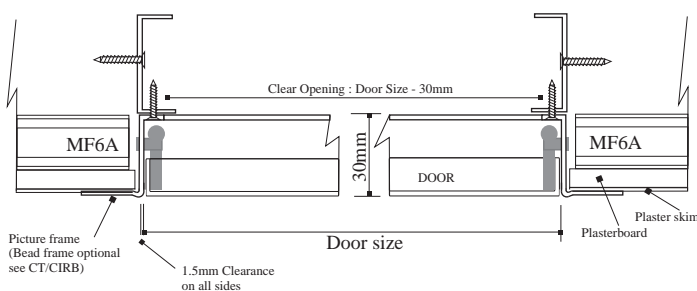

Bead Frame in single layer MF plasterboard application

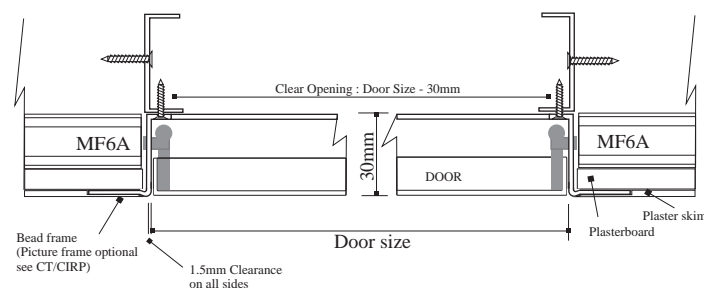

Bead Frame in single layer Joist plasterboard application

